1. Pack Contents

1 x In-line fuse unit (3 Amp)
1 x POWERSENSEnode engine running sensor
1 x Power cable
1 x RADARnode wireless transmitter
1 x RDI software card for the V1 (inserted in RADARnode)
1 x Cheetah connector cable for the V1
1 x User manual

Cheetah parts are pre-connected for your convenience. Our 2-pin mini connectors push-fit together and lock securely. To unclip, press the lever down and gently pull them apart.

The RADARnode is a wireless transmitter (433 Mhz) that connects up to your radar detector's power supply socket. When your radar detector gives an alert, the RADARnode digitally analyzes the alert data and transmits a radio code to your helmet display.

The small flying lead with half a bullet connector at the end (plastic sheathed) is an over-ride cable for connecting to a Cheetah Laser Jammer Interface in motorcycle installations.

The POWERSENSEnode is a clever "engine running" sensor that turns on power when you start up your motorcycle and turns it off when you stop the engine. It's an instant, "ignition-switched" supply that makes it quick and easy for anyone to create a safe power supply directly from the battery terminals. It eliminates the need for direct wiring into your bike's electrical system.

The RADARnode Transmitter

Warranty & Support

Warranty Registration
Register online at ***www.SpeedCheetah.com***

Limited Warranty
Cheetah Advanced Technologies Ltd. warrant our products against all defects in materials and workmanship for a period of **one year** from the date of the original purchase. Full warranty terms and conditions available online at:
www.SpeedCheetah.com

Service & Support
If for any reason your Cheetah product develops a fault, please check our Customer Service page on:

USA & Canada - visit www.GPSdetector.com

Europe & Rest of World - visit www.SpeedCheetah.com

If any problems persist, or to arrange a product return, please email ***support@SpeedCheetah.com***

Cheetah Advanced Technologies Ltd. declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

© 2009 Cheetah Advanced Technologies Ltd, Scotland. All rights reserved.

THIS INTERFACE IS COMPATIBLE WITH:

M2Alert M2Alert V2

INTERFACE

for the Valentine One

Cheetah

Cheetah

Radar Detector INTERFACE

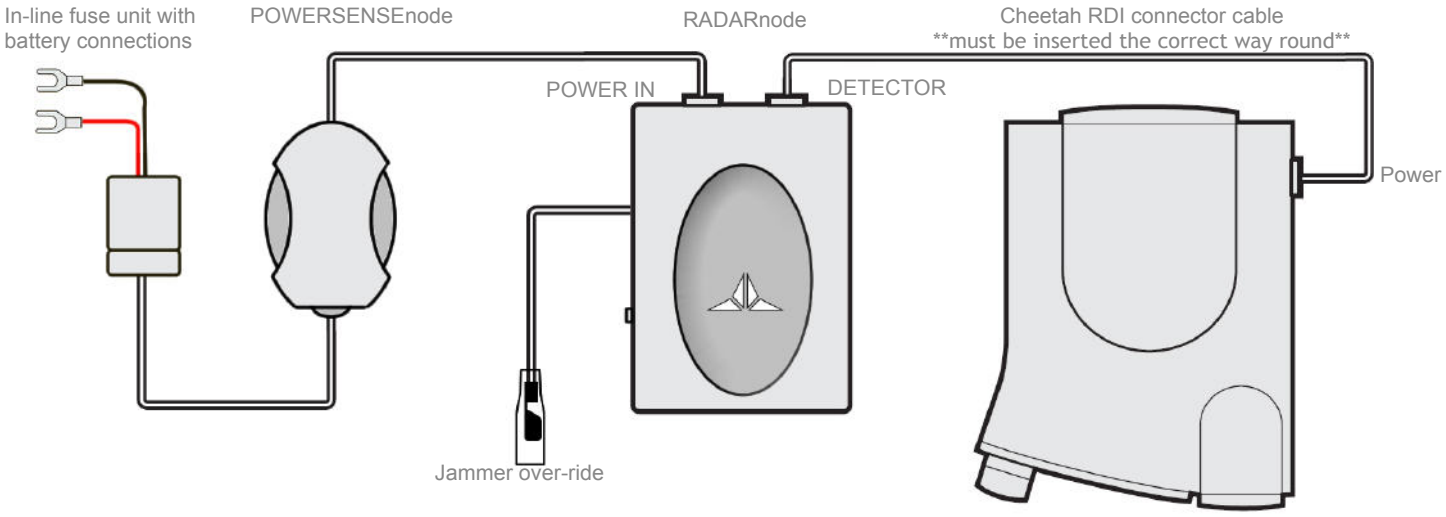

2. Installing the RADARnode

Instal the RADARnode according to the diagram above. Please note that the RADARnode transmitter is **not water-proof so should always be positioned in the seat cavity.**

2.1 The Cheetah connector cable for the V1 must be installed the correct way round. Each end of the cable is labeled. **If the cable is inserted the wrong way round it will not work**. Plug the end labelled "V1" into your Valentine detector.

2.2 Safely route the RDI connector cable from your V1 to the RADARnode transmitter underneath the motorcycle seat. Secure the Cheetah cable to the bike wherever possible, avoiding contact with any high temperature engine components or the exhaust system.

2.3 Plug it into the RADARnode socket marked DETECTOR.

2.4 Double check that the RDI software card and connector cable are specific to your radar detector. The RDI software card is pre-installed in the side of the RADARnode transmitter. **Always ensure that the power is OFF before removing or inserting your RDI software card.**

2.5 Connect the POWERSENSEnode and fuse pack directly to the battery terminals. RED is positive, BLACK is negative. There is no need to remove the leads from the battery. Just loosen the nut on the clamp, slide in the spade terminal, and re-tighten the nut.

2.6 Finally, plug the power cable into the RADARnode socket marked POWER.

2.7 OPTIONAL - laser jammer installations only. Connect the small flying lead with the bullet connector to the similar over-ride cable on the Cheetah LASERnode.

3. Setting up your Valentine 1

V1 menu items can be set according to personal preference.

IMPORTANT - If you add in a Valentine Concealed Display or a Valentine Remote Audio Adapter, this standard pack does not enable these Valentine remote displays to function correctly.

To make them work, you can purchase an extra component called the Cheetah V1 Remote Adapter from our website at ***www.SpeedCheetah.com*** and click on motorcycle products in the main menu.

4. Using your VizAlert & Valentine 1

4.1 Starting up your system
The radar detector and VizAlert display work independently.

The POWERnode attached to the battery will automatically turn on the power to the RADARnode transmitter and radar detector when you start your motorcycle's engine. It will remain on for as long as the engine is running.

The VizAlert's battery pack has a sliding ON/OFF switch. All 6 LEDs will flash once, at the same time, to confirm it is switched on. When you power up your detector, the transmitter will begin to transmit to the VizAlert helmet receiver. The VizAlert LED's will flash in a circular sequence when the wireless link has been established.

4.2 Testing your system
Press and release the test button on the side of the RADARnode. The VizAlert will flash each LED in sequence.

Remember, your engine must be running for the transmitter and detector to be powered up.

4.3 Alerts
Please refer to the VizAlert Display manual for interpreting alerts.

Ku band users (Europe) - If Ku band is enabled, please note the V1 uses the same audio tone for K and Ku bands. The RADARnode will copy this and transmit a K band warning for both K and Ku alerts so the VizAlert display will flash white for both K and Ku bands.

4.4 Switching off your system.
When you switch off your engine, power to the RADARnode transmitter and radar detector is automatically switched off.

The VizAlert is motion sensitive and switches off after 10 minutes of no movement.

The VizAlert V2's battery pack has a sliding ON/OFF switch and an automatic shut off function if you leave it on by accident.

5. Troubleshooting

Constant KU Band radar alert
RDI software card is not correctly installed. It must be fully inserted into the slot on the side of the RADARnode. Switch off power, then remove the card and re-insert flush. **Always ensure that the power is OFF before removing or inserting your RDI software card.**